
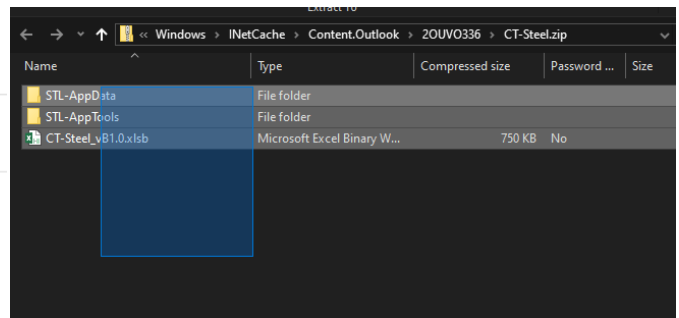



CT-Steel Update Instructions

1. Open and copy the contents of the zip archive

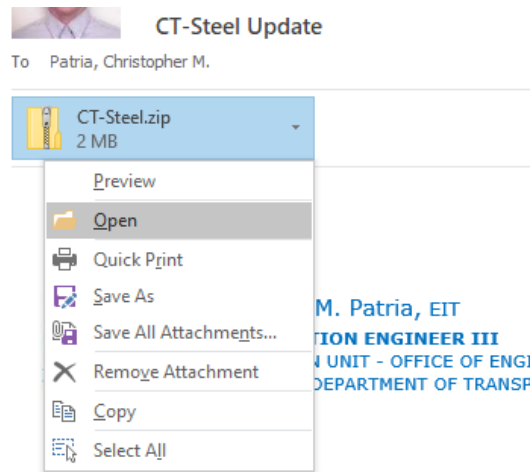

2. Paste the contents of the zip archive to same folder the previous version of CT-Steel is stored.

Replace the existing files.

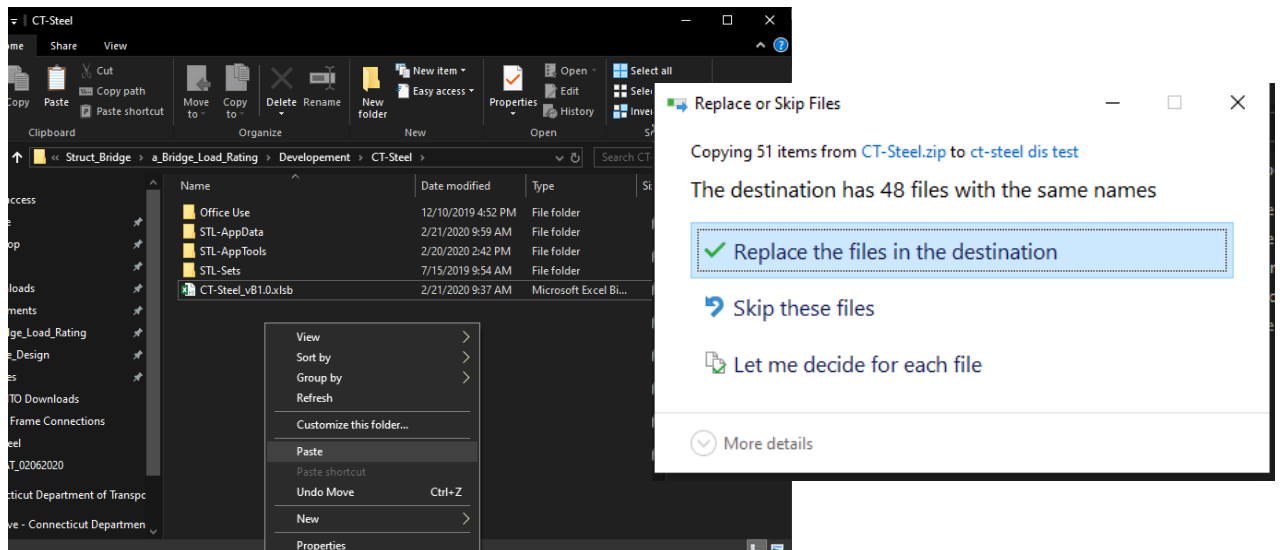

If the bridge list is empty, this means that the previous version of CT-Steel stored the bridge list file in a different location.

To correct this, move the BridgeSets.xml in STL-Sets folder.

